




BBSS

- Non-lubricant Universal Slide Core Unit - Advantage
- This slide unit leads the angular pin to slide in smooth way when core moves inclined injection including any undercut.
- This slide unit adjusts by itself center, therefore it prevents wear and stick of the guide and the slide plate.

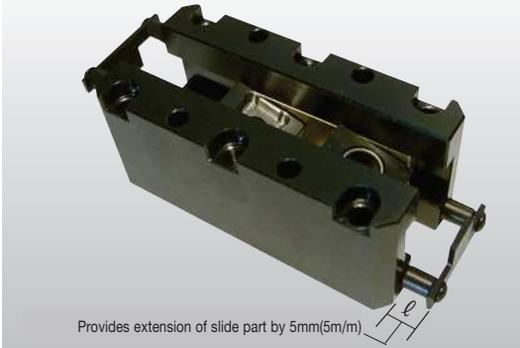

Provides extension of slide part by 5mm(5m/m)

No	Description	Q'ty	Material
1	Slide Block	2	SCM440
2	Core shaft Block	1	SCM440
3	Guide Block	1	SCM440
4	Bushing	1	DU
5	Guide Plate	2	#500SP(CAC304+Gr)
6	Stopper Plate	2	SS41

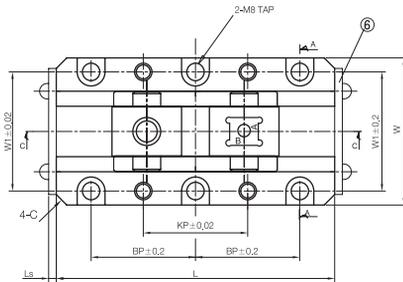

특허청
COMMISSIONER, THE KOREAN INTELLECTUAL PROPERTY COMMISSION

Patent No. : 10-0746267




Catalog Code

A×B-θ°

BBSS - 12×10-5°

*Take off ⑥ Stopper Plate when assemble on injection tool.

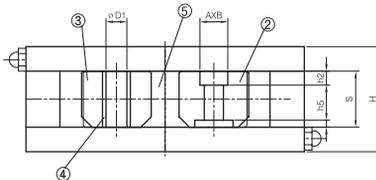

φ D	C1	Ls	Ⓐ	Ⓑ	Over10° (θ)
6	3	4.8	0°~10°	0°	H+10
8	3	4.8	0°~10°	-	Quotation by drawing
10	4	4.8	0°~10°	-	
12	5	4.8	0°~10°	-	
16	6	4.8	0°~10°	-	
20	6	4.8	0°~10°	-	
25	6	4.8	0°~10°	-	

A×B	D1	W	L	H	W1	BP	KP	G	h2	h5	ℓ	S	B	BH	φ K	φ d	φ d1
8×8	6	38	77	34	28	28	28	17	4	-	47	14	M4	28.5	4	4.5	-
10×10	8	42	88	38	32	32	32	19	4	-	53	16	M4	32.5	4	5.5	-
12×12	10	52	100	45	41	41	36	22.5	4	-	60	20	M6	38.5	6	5.5	-
16×16	12	56	115	48	46	45	42	24	5	3	70	20	M6	41.5	6	9	16
20×20	16	64	130	56	52	51	46	28	5	5.5	80	24	M6	49.5	8	11	20
25×25	20	71	148	62	59	58	54	31	6	5.5	93	26	M6	55.5	8	11	20